

**Presented By:** Candela Corporation  
Contact Phone: (800) 922-9226  
Contact E-mail: sales@candelacorp.com

Customer Name:  
Project Name:  
Fixture Type:





GE  
Lighting

### 47262 - 100A/RS/CVG-6PK

GE covRguard® A21 - Shatter-Resistant; Rough Service

• Coating is shatter and weather-resistant. Resists breakage from heat and thermal shock that can occur from water, sleet, snow, molten solder, and weld spatter. Rough service version available for extra tough conditions.

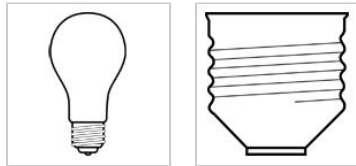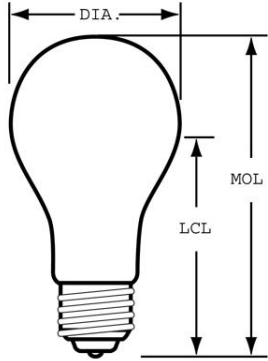

#### CAUTIONS & WARNINGS

##### Warning

- Risk of Fire  
- Keep combustible materials away from lamp.

#### NOTES

- Lamp base is a brass base (BB).
- Will operate in any burning position, but fixed-socket usage other than base up or continuous burning in any position in ambient temperatures above 150 degrees F (66 degrees C), may result in some loss of protective coating. Reflectors and accessories may

#### GENERAL CHARACTERISTICS

Lamp Type	Incandescent - A-line
Bulb	A21
Base	Medium Screw (E26)
Filament	C-17
Bulb Finish	Inside frost
Wattage	100
Voltage	120
Rated Life	1000 hrs
Base Material	Brass
Primary Application	Shatter-Resistant; Rough Service

#### PHOTOMETRIC CHARACTERISTICS

Initial Lumens	1230
Nominal Initial Lumens per Watt	12

#### ELECTRICAL CHARACTERISTICS

Burn Position	Universal burning position
---------------	----------------------------

#### DIMENSIONS

Maximum Overall Length (MOL)	5.2500 in(133.4 mm)
Bulb Diameter (DIA)	2.625 in(66.7 mm)
Bulb Diameter (DIA) (MAX)	2.625 in(66.7 mm)
Light Center Length (LCL)	3.810 in(96.8 mm)

#### PRODUCT INFORMATION

Product Code	47262
Description	100A/RS/CVG-6PK
Standard Package	BUNDLE
Standard Package GTIN	00043168472623
Standard Package Quantity	30
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	30
UPC	043168901512