


## Specification Sheet

**Catalog Number:** 1010-247SC-TC  
**Document # :** 010-10415- 00  
**Date:** 03/09/2004

**400 W MERCURY**

Lamp Type	<b>400 W MH</b>
ANSI Designation	<b>H33 or 325 I-Line</b>
Line Voltage	<b>120/277</b>
Regulation	<b>±10%</b>
Frequency	<b>60 HZ</b>
Recommended Fuse	<b>10/5</b>
Circuit Type	<b>CWA</b>
Insulation Class	<b>Class A (90°C)</b>
Capacitor Value	<b>INTERNAL</b>
Capacitor Volt Rating	<b>N/A</b>
Capacitor Part Number	<b>N/A</b>
Lamp Starter	<b>INTERNAL</b>


Replaces Catalog #	<b>N/A</b>
Samples Available	<b>Yes</b>
Production Available	<b>YES</b>
Agency Certification	<b>UL/CSA</b>
Maximum Distance to Lamp	<b>N/A</b>

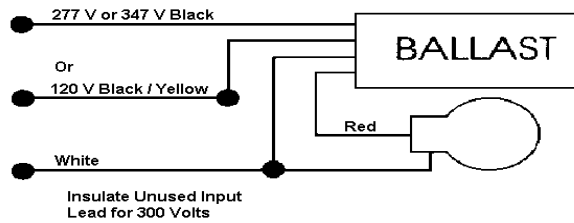

**FEATURES:** Thermally protected  
 Enclosed in fluorescent style ballast can  
 Anchor bracket / Tab provided for splice box (SB-4 Not included)

### Electrical Characteristics

Line Volt	Power Factor	Line Current in Amps			Input Watts	Open Circuit Volts	Drop Out Volts	Min. Start Temp.	Sound Rating
		Oprtng	Open	Start					
120	High	3.80	N/A	N/A	450	245	66	-30°C	C
277	High	1.65	N/A	N/A	450	245	152	-30°C	C

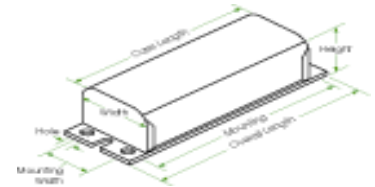

Reference Drawing

### Physical Characteristics

Overall Dimensions (In.)				Mounting Holes (In.)			Bracket Mntng Dim		Ballast Net Weight	Lead Length Inches
Length	Width	Height	Case Length	Length	Width	Hole	Length	Width		
16.69	3.19	2.63	13.19	15.56	2.00	0.23	-	-	18.50	12-14

For samples, contact your Universal Lighting Technologies Representative.  
 Specification and Performance Information Subject to Change without Notification.